

B-R




3 Speed, Wet Running, Bronze Execution, Re-Circulation Pumps


FEATURES

- Electric circulator pumps for sanitary hot water circulation
- Temperature of pumped liquid +2°C / +65°C
- Maximum operating pressure 10 Bar (PN10)
- Impeller: Composite material
- Insulation Class: H and IP44 protection
- Three-speed hand selector motor
- Copper winding
- Bronze pump body designed for direct installation on to copper piping with 1" threaded connections.
- Single-phase 230V 50 Hz power supply
- Suitable for installation in horizontal or vertical piping in any position provided that motor axis is horizontal.

Designation

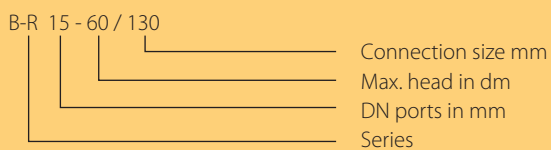


Unions



Type	DN	DN1
KIT G1 - G½ (R 15..)	G1	G½


Installation

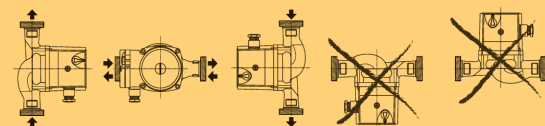


B-R

3 Speed, Wet Running, Bronze Execution, Re-Circulation Pumps

B-R 15-60/130

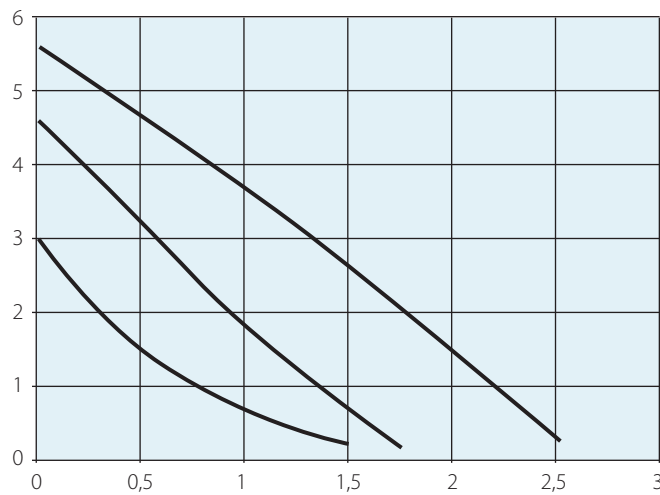

Model	Voltage/Freq.	Power 3/2/1	Max. Flow (l/min)	Max. Head (m)	Inlet/Outlet	Pipesize
B-R 15-60/130	1-230V/50 Hz	96/69/45	40/32/23	5,5/4,5/2,8	15	1"

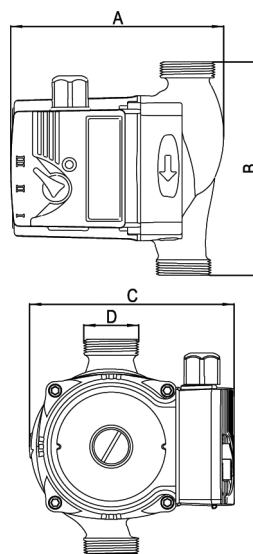

Model	A	B	C	D	Weight kg
B-R 15-60/130	130	130	125	G 1	2,41